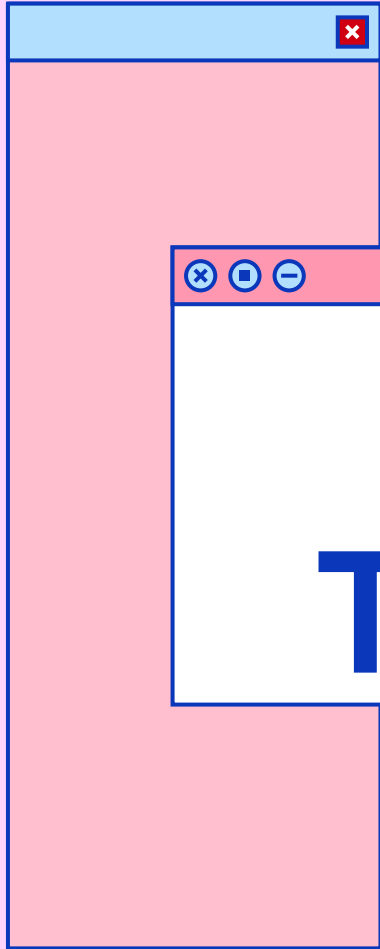


CYBER TERMINOLOGY


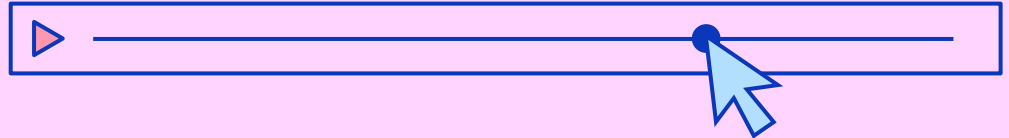




TABLE OF CONTENTS



01

ADWARE

05

FIREWALL

02

BACK DOOR

06

VULNERABILITY

03

BRUTE FORCE ATTACK

07


PHISHING

04

DOS


08

VIRUS



ADWARE

Adware, also known as advertising-supported software, generates revenue by displaying adverts on your screen, usually within a web browser. Adware is typically created for computers but can also be found on mobile devices. Some forms of adware are highly manipulative and create an open door for malicious programs.

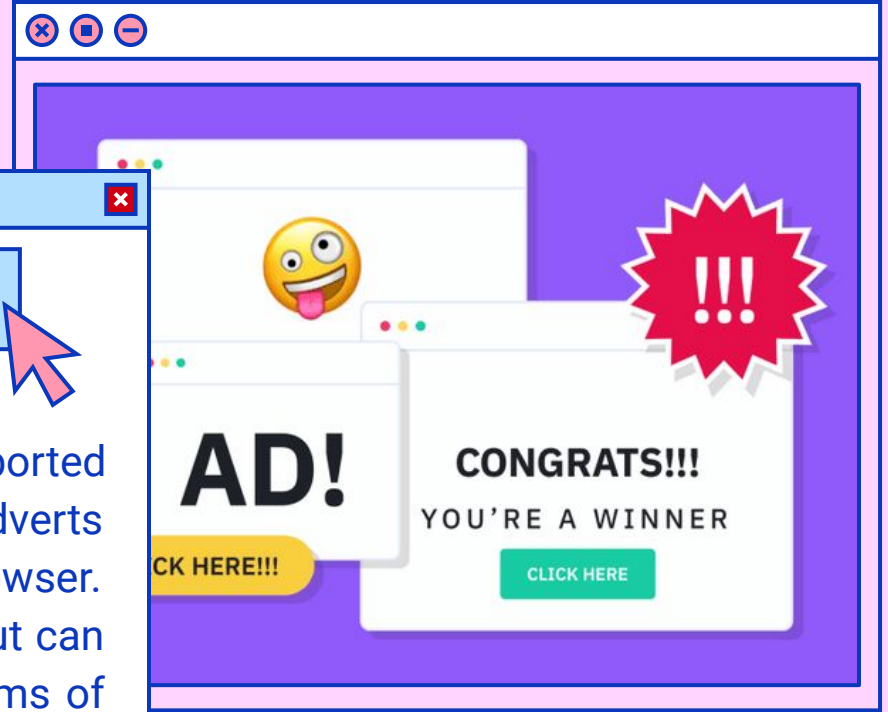

BACK DOOR

A back door or trap door is a hidden entry to a computing device or software that bypasses security measures such as files, logins and password protections




BRUTE FORCE ATTACK

A Brute Force attack is an automated and the simplest kind of method to gain a access to computer. It tries different combination of usernames and password, over and over again until it gets in.

Brute Force attack is also known as **Dictionary Attack**.



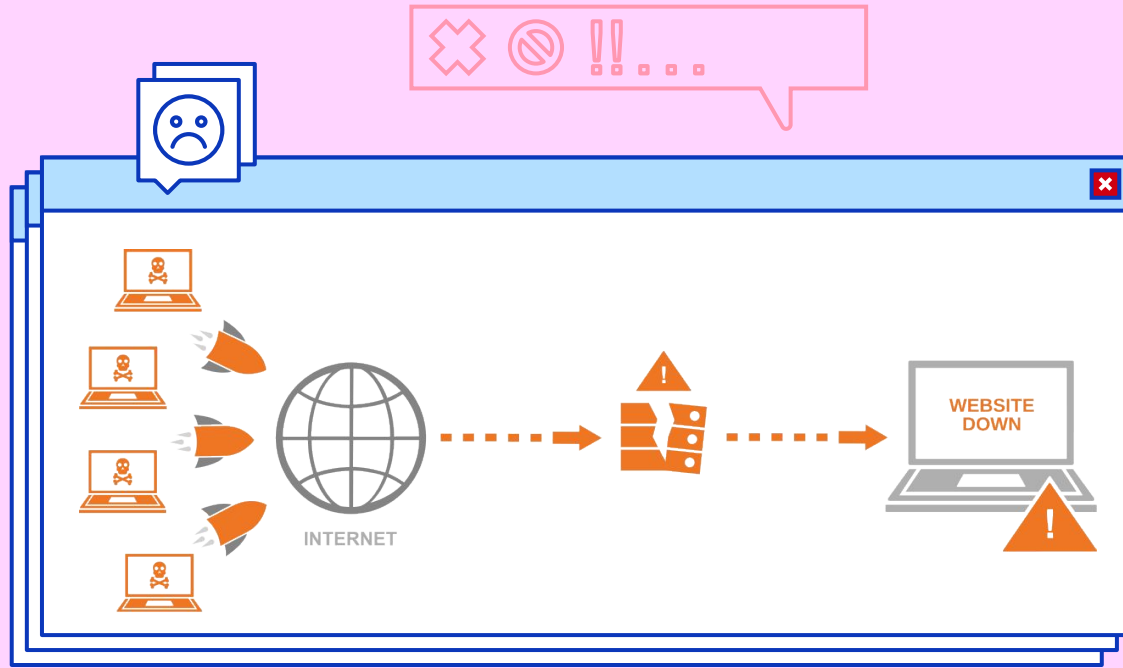


+ + + + +
+ + + + +
+ + + + +



DOS

A Denial of Service (DOS) is a malicious attempt to make a server or network resources unavailable to users by temporarily interrupting or suspending the service of a host.

FIREWALL

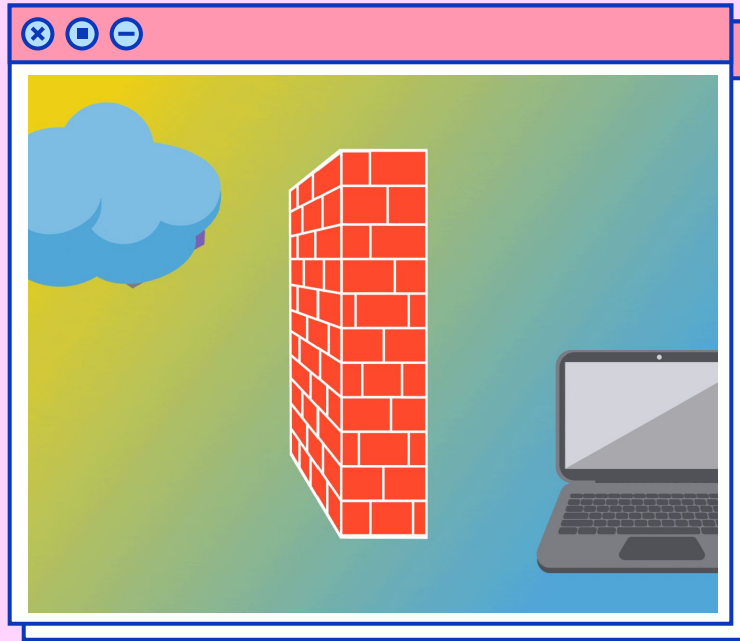

A firewall is a filter designed to keep intruders outside a computer system or network while allowing safe communication between system and users on the inside of firewall.

VULNERABILITY





USERNAME

PASSWORD


[Forgot password?](#)

LOG IN



PHISHING

Phishing is an email fraud method in which the perpetrator sends out legitimate looking emails, in attempt to gather personal and financial information from recipients.





VIRUS



A virus is a malicious program or a piece of code which is capable of copying itself and typically has a detrimental effect such as corrupting the system or destroying data.

